


# HYDRAULIC DIRECTIONAL CONTROL VALVES

## РАСПРЕДЕЛИТЕЛИ ГИДРАВЛИЧЕСКИЕ

Type: P120

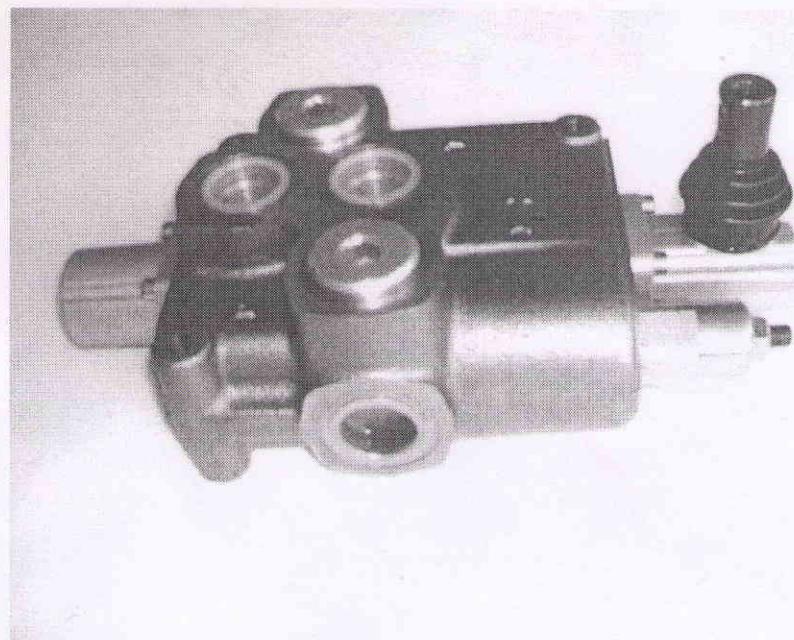

### Description

#### Назначение и область применения

For starting, controlling and stopping the working fluid between the generator of pressured flow, the consumers and the Tank. Предназначен для изменения направления потока, ограничения давления рабочей жидкости в гидролиниях, разгрузки насоса в нейтральной позиции золотников.



### Specifications

#### Основные показатели:


1. Valve monoblock	
Конструктивное выполнение	моноблок
2. Mounting	3 bolts M10
Крепление	
3. Pressure connections	internal thread
При соединительные отверстия	внутренние резьбы
4. Ambient temperature	-40C...+60C
Температура воздуха	
5. Pressure medium	mineral oil based hydraulic oil
Рабочая жидкость	
6. Viskosity	12...800 mm <sup>2</sup> /s permissible range
Кинематическая вязкость	20...100 mm <sup>2</sup> /s recommended range
7. Fluid temperature	- 15C...+80C
8. Filtration	Oil contamination 10 to NAS1638
9. Max. operating pressure	P = 250 bar
Давление max. bar	T = 50 bar
10. Leakage	A, B = 300 bar
Внутренние потери (A, B - T)	30 cm <sup>3</sup> /min at 120 bar
11. Nominal flow	120 l/min (see "operating" diagram)
Разход рабочей жидкости	± 10 mm, L12 = ± 10 mm +6 mm
12. Spool stroke	< 300 N in spool axis direction
Ход золотника	
13. Actuating force	
Усилие на движения золотника	

directional control valve P120

parallel

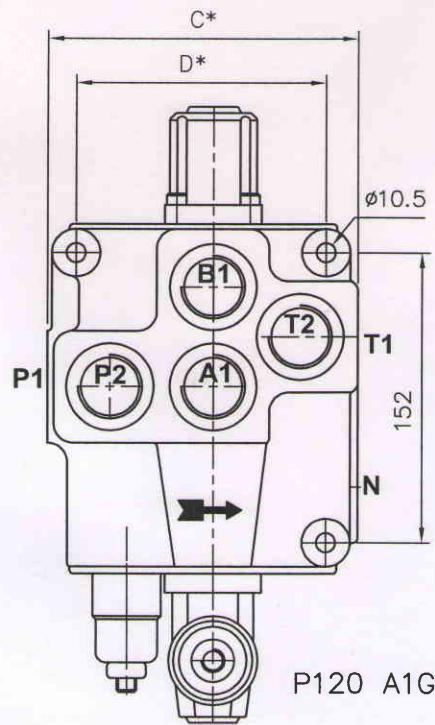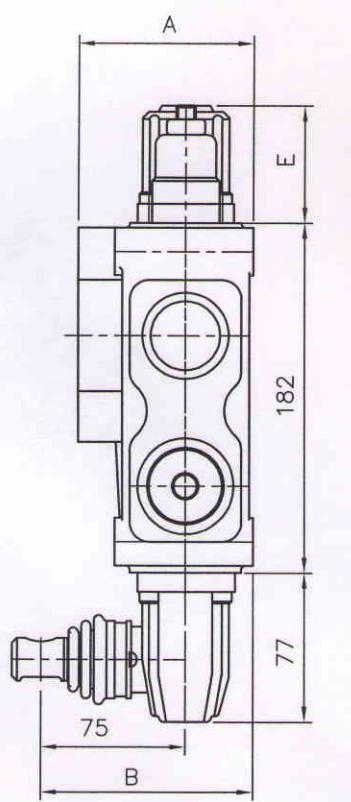

P120 A1GKZ1

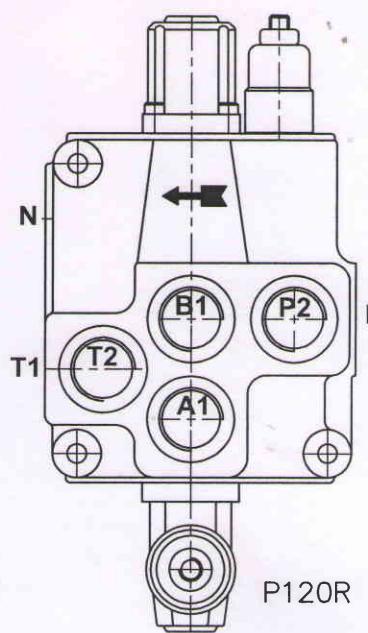

P120R A1GKZ1

\* for each next spool + 53 mm

Table 1

	A	B	C	D	P1	P2	T1	T2
P120	92	110	160	129	+	+	+	+

Table 2

spool control фиксации золотника	E
1; 2, 3, 4; 5; 6; 7; 8; 9; 10; 11;	64
12	74

02 P120 1 A 1 L 12 G KZ1 H E C2 -11

number of spools

hydraulic directional control valve P120

parallel distribution (parallel)

spool type-distribution

spool control (table 2)

second spool distribution (table 1)

second spool control (table 2)

ports threads (table 5)

lever options (table 6)

operation features (table 4)

electric microswitch (table 3)

carry over center (table 7)

connection ports in use (table 8)

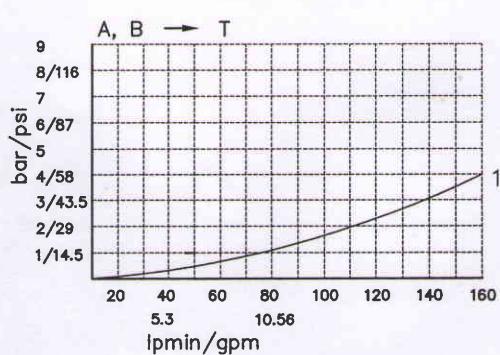
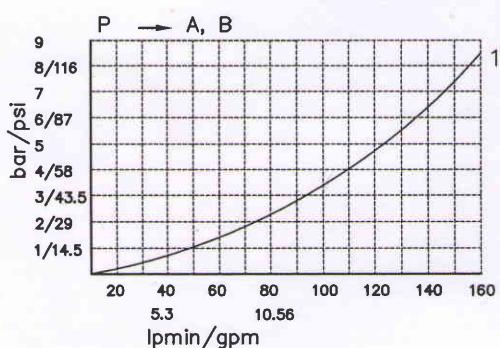
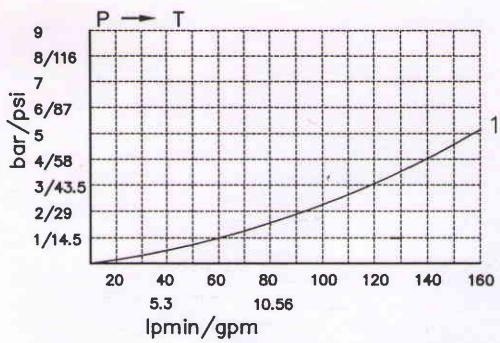
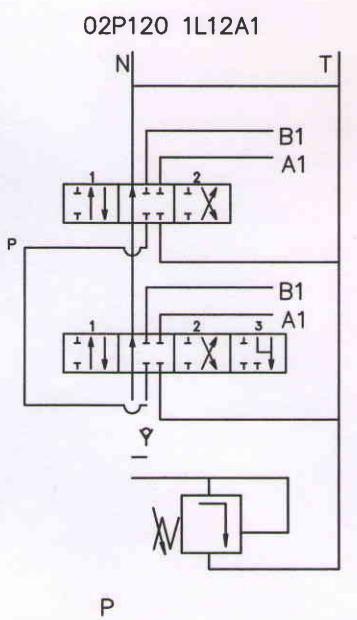


Table 3			
code	Number of spools	code	way of distribution ; распределение потока
P	1	1	parallel ; паралельное
02, 2	2	(2)	(tandem(series parallel)) ; серийно-паралельное
03, 3	3		
etc.			

Table 5			
code	spool type	code	spool control
A		1	1 0 2
B		2	1 0 2
C		3	1 0 2
D		4	0 2
E		5	1 0
F		6	1 1 2
G		7	1 1 2
H		8	1 0 2
M		9	1 0
N		10	0 2
O		11	1 1 2
P		12	1 0 2 3
Q		13	1 0 2 3
R			
S			
T			
L			

Table 7			
code	с микро шальтер ; incorporated microswitch		
E		mikroswitch type Omron-V 165 I C5	

Table 8			
code	другое управление ; operation feature		
P		пневматическое on-off pneumatic control; 5-10 bar ; ports G1/4	
H		гидравлическое on-off hydraulic control ; pn = 5 - 20 bar ; ports G1/4	

treads for connection

Table 9

outlets/ports/	metric	BSP	SAE	NPT
P, A, B, T	M33x2	G 1"	SAE 16	1 - 11.5
N	M36x1.5	-	-	-

Table 10

code	with thread M12	code	with cage Ø12	code	with cage Ø12
KZ		KY		KI	
KZ1		KY1		KI1	
KZ0		KY0		KI0	
KZ01		KY01		KI01	

Table 11

code	metric
X	without N
-	with N, but closed
C	with N, closed center
C1	with N - carry over for ermeto
C2	with N - carry over, internal thread

Table 12

code	ports for connection in use
11	P1 ; T1
12	P1 ; T2
21	P2 ; T1
21	P2 ; T1

